

Measuring and Ordering Casement Sash "With Glass"

Note: Casement replacement sashes are available without glass. Please see **Wood and Clad Casement Sash Kits**

What you will need:



Tape measure




Paper and writing instrument
OR print out this sheet

1. First. Determine the type of casement window you are replacing.



Wood



Clad w/ Miter Joint




Clad w/ Butt Joint



2. Second. Measuring the window.

Measure the daylight opening of the window, this is the opening that would be cleaned when cleaning the glass.

Do not measure the outside of the window, only the opening that receives daylight. This area is highlighted green in the illustration.

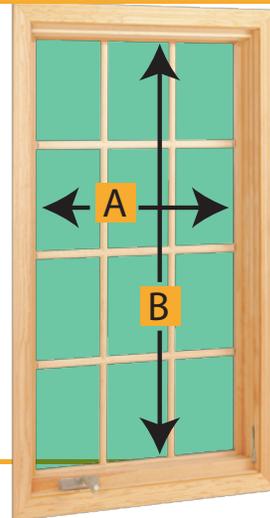

Daylight opening shown in green

A= Width
B= Height

3. Third. Provide us the info!*

PRODUCT:

- Wood Casement Sash with Standard glass
- Wood Casement Sash with Low-e glass
- Clad Casement Sash with Standard glass
- Clad Casement Sash with Low-e glass

SIZE (from step 2 above):

Sash: A=_____ X B=_____

CLAD COLOR (if applicable):

- White Bronze Sandstone
- Other-Call for price

CLAD EXTERIOR CORNER (if applicable from step 1 above):

- Clad with Miter Joint
- Clad with Butt Joint

WE OFFER VARIOUS TYPES OF GRILLES:

Grilles sealed in the insulating glass and three sizes of SDL (Grilles permanently applied to the interior and exterior of the glass). If your window requires grilles please contact us for pricing.

* Use answers from Step 3 to place your order in the Buy Parts portion of biltbestreplacementparts.com